

Collection Space Navigator: An Interactive Visualization Interface for Multidimensional Datasets

Tillmann Ohm^{*‡1,2} Mar Canet Solà^{*‡1,3}
 Andres Karjus^{1,4} Maximilian Schich^{1,3}

¹ERA Chair for Cultural Data Analytics, Tallinn University

²School of Digital Technologies, Tallinn University

³Baltic Film, Media and Arts School, Tallinn University

⁴School of Humanities, Tallinn University

‡Corresponding authors: tillmann.ohm@tlu.ee, mar.canet@tlu.ee

*equal contribution as first authors

May 10, 2023

Abstract

We introduce the Collection Space Navigator (CSN), a browser-based visualization tool to explore, research, and curate large collections of visual digital artifacts that are associated with multidimensional data, such as vector embeddings or tables of metadata. Media objects such as images are often encoded as numerical vectors, for e.g. based on metadata or using machine learning to embed image information. Yet, while such procedures are widespread for a range of applications, it remains a challenge to explore, analyze, and understand the resulting multidimensional spaces in a more comprehensive manner. Dimensionality reduction techniques such as t-SNE or UMAP often serve to project high-dimensional data into low dimensional visualizations, yet require interpretation themselves as the remaining dimensions are typically abstract. Here, the Collection Space Navigator provides a customizable interface that combines two-dimensional projections with a set of configurable multidimensional filters. As a result, the user is able to view and investigate collections, by zooming and scaling, by transforming between projections, by filtering dimensions via range sliders, and advanced text filters. Insights that are gained during the interaction can be fed back into the original data via *ad hoc* exports of filtered metadata and projections. This paper comes with a functional showcase demo using a large digitized collection of classical Western art. The Collection Space Navigator is open source. Users can reconfigure the interface to fit their own data and research needs, including projections and filter controls. The CSN is ready to serve a broad community.

1 Introduction

Large collections of digital artifacts with multidimensional associated metadata can be studied using browsable interactive visualizations that reflect or at least resonate with the intrinsic shape of their data (Manovich 2012b). Mapping the multidimensional topology of a collection into a multidimensional space can help to better understand the overall structure of a dataset and can uncover patterns hinting at underlying trends and dynamics. For example, a researcher or curator may visually explore the space, as constituted by some measure of artifact similarity, looking at different groups of similar objects to identify regions of interest for further quantitative and qualitative investigation.

Multidimensional feature vectors further describe artifact properties in a heterogeneity of ways. This can include both categorical and numerical information. Numerical properties can be derived directly from meta-

data, such as in the case of artifact creation dates, or constructed through various feature extraction techniques. Neural network methods, for example, can encode measures of complex text semantics (Devlin et al. 2018), of visual image properties (Krizhevsky et al. 2017; Simonyan and Zisserman 2014; He et al. 2016; Kolesnikov et al. 2020), of joint image-text pair embeddings (Sohl-Dickstein et al. 2015; Radford et al. 2021; Rombach et al. 2022), or of spectral audio features (Ren et al. 2018). Hand-crafted feature engineering approaches (Zhang et al. 2020) and more straightforward algorithmic approaches such as compression ensembles (Karjus et al. 2022) further promise to offer more interpretable vector representations.

Dimensionality reduction techniques can be used to reduce high-dimensional data to a more manageable number of dimensions by remapping or projecting the multidimensional topology into a lower-dimensional coordinate space (Pearson 1901; Van der Maaten and Hinton 2008; McInnes et al. 2018; Amid and Warmuth 2019; Tang et al. 2016). For visual interpretation of multidimensional embedding spaces, such projection methods are used to present the data in two or three dimensions, which essentially can function as a more or less distorted reference topography of the original multidimensional topology. The challenge for dimensionality reduction techniques is to preserve complex relationships, while removing information. For example, objects close to each other in high-dimensional topological space should ideally also be close to each other in the low-dimensional topographic projection space.

Multiple projection views can help to better understand multidimensional data (Amid and Warmuth 2019). Two-dimensional static projections are visually comprehensible, but can only provide a limited view into multidimensional data. Alternatively, to gain intuition over a high-dimensional vector space, it can be helpful to interpret and compare many different projections. Interactive components in graphical user interfaces (GUI) can further help to gain intuition over the complex interactions between many dimensions. Graphical user interface elements such as range sliders are particularly useful to navigate through multiple features and dimensions, and to query and filter the data (Williamson and Shneiderman 1992; Ahlberg and Shneiderman 1994).

2 Related Work

Most closely related to the Collection Space Navigator are multiple interactive visualization experiments and prototypes which have emerged in recent years, and which mediate high-dimensional embeddings through low-dimensional projections. They either try to provide an intuitive understanding of multidimensionality and embedding methods by visualizing datasets commonly used for Machine Learning tasks (Smilkov et al. 2016; Labs 2019; Custer 2020), or offer explorative interfaces to similarity spaces of cultural collections (Diagne et al. 2018; Duhaime 2017; Øygard 2017; Glinka et al. 2017). These interactive visualization projects aim to provide overview and deeper insight into their collections, tailored to specific datasets. The VIKUS Viewer (Pietsch 2017; Pietsch et al. 2020) offers a more general framework for exploring cultural collections. It allows not only to view a collection as a similarity map of its image embeddings, but also to dynamically filter meta-data such as time and categories. The Selfexploratory of the Selfcity project (Manovich et al. 2015) similarly uses a number of range sliders to filter a multidimensional dataset of images.

The CSN user interface aligns with classic conventions of cultural cartography and modern examples of interactive data visualization and scholarly figure design. Following long-established conventions, the CSN combines a cartesian projection with an auxiliary index and call-out details (Nolli 1748).

Following a modern paradigm of interactive figure design (Bertin 2010; Victor 2011), the CSN further allows for a deeper functional user experience (UX) and eventually understanding of multidimensional data. The navigation paradigm of the CSN range sliders, which function as Dimension Filters, further resonates, in particular, with the recent state-of-the-art of understanding mathematical multidimensionality via interactive animation (Sanderson 2017). The CSN combines these foundations with the paradigm of a scatter plot of

images as made popular in Cultural Analytics since 2012 (Manovich 2012a). The CSN is also functionally similar to network visualization applications, such as Cytoscape (Shannon et al. 2003) or Gephi (Bastian et al. 2009), which focus on depicting another (yet related) form of multidimensionality in node-link diagrams of complex networks (Böhm et al. 2022).

Even more broadly, the authors of the TensorFlow Embedding Projector (Smilkov et al. 2016) suggest to include multipanel projections, i.e. more than one simultaneous projection panel. This would also make sense as a possible extension of the CSN and would be in line with the prevalence of “multi-chart” figure panels in multidisciplinary science journals (Lee et al. 2017; Berghaus 1845).

3 The Collection Space Navigator

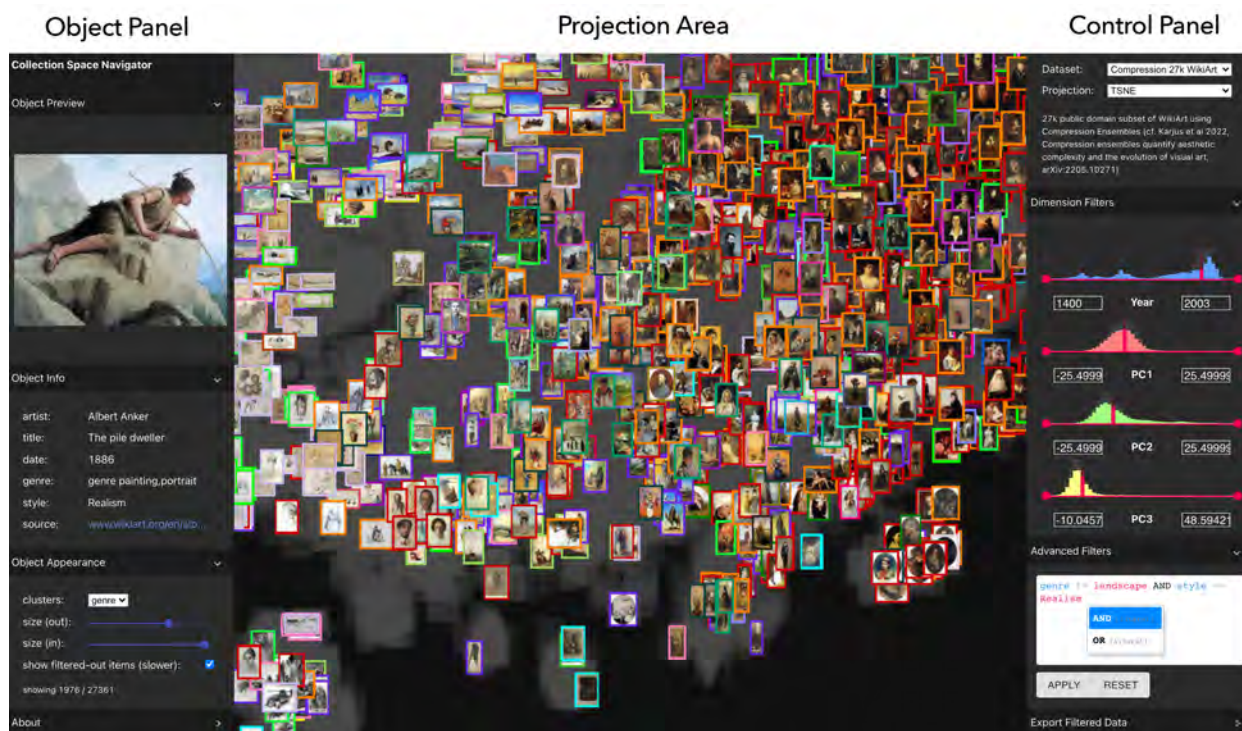


Figure 1: The Collection Space Navigator (CSN). The central *Projection Area* displays a x-y scatter plot of images based on the selected projection (e.g. UMAP, t-SNE), with filtered images greyed out, and mouse-over highlight. The *Object Panel* (left) shows a larger *Object Preview* of the highlighted image, together with *Object Info* based on selected metadata; *Object Appearance* visualizes clusters (optional), sets the projection thumbnail size (zoomed-out and zoomed-in). The *Control Panel* (right) allows for selection of *Data and Projections*; custom interactive *Dimension Filters* and *Advanced Filters* facilitate dataset exploration, analysis, and understanding (see text); the filtered object metadata and current projection view can be downloaded via *Export Filtered Data*.

3.1 Motivation

We developed the Collection Space Navigator as a flexible browser-based research tool applicable across various use cases and research domains:

1. Researching large collections of digital objects (e.g. images, videos, audio, text, 3D models) with the ability to identify patterns and similar groups based on metadata and vector embeddings;

2. Understanding multidimensionality and projection methods by comparing different embedding spaces and dimensionality reduction techniques through intuitive navigation;
3. Presenting entire media collections online and communicating research findings with diverse audiences.

While prototypes and use cases exist for each of these aspects as discussed above, we are not aware of a tool that meets all of these requirements. Our contribution therefore lies in the combination and extension of existing interfaces to work towards a more universal and open modular research and curation system.

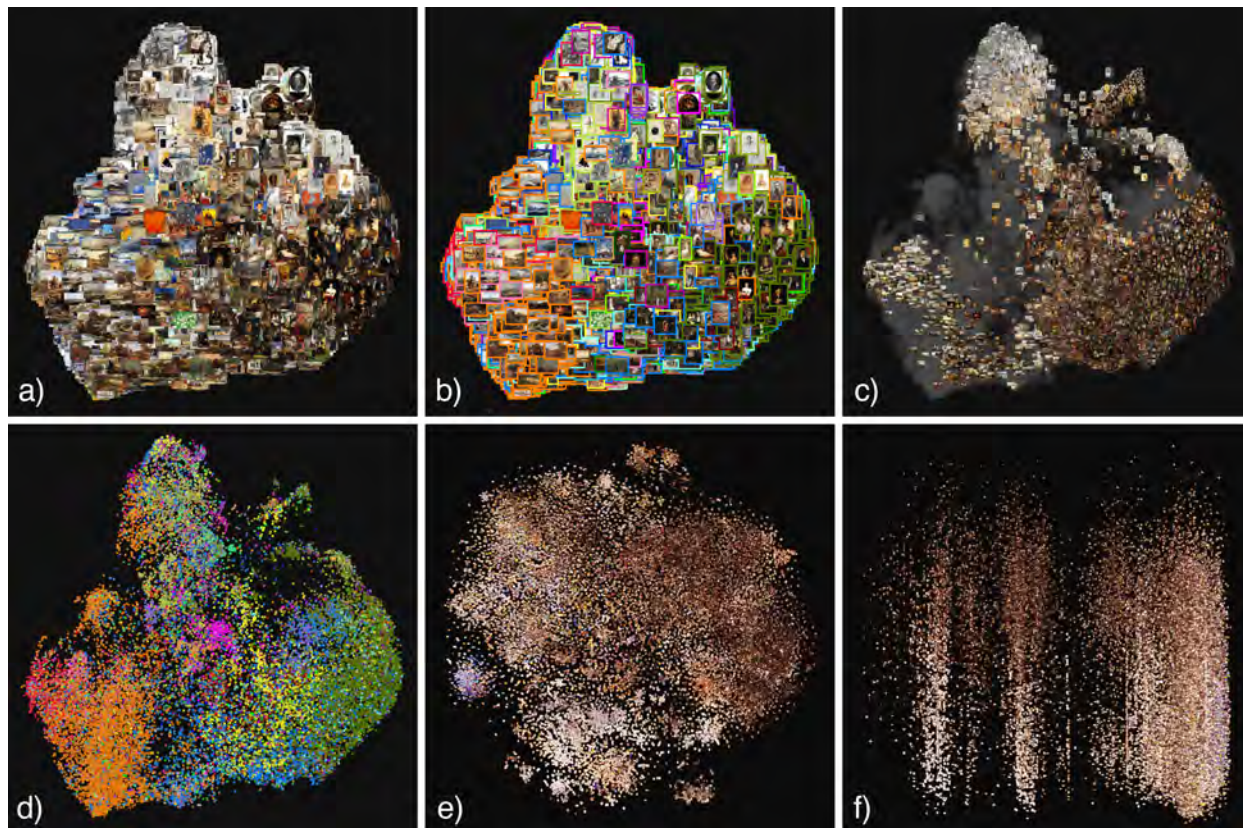


Figure 2: Examples of various 2D projections and visualization features in the CSN tool. a) UMAP projection with large thumbnails, providing a comprehensive view of the image content; b) UMAP projection with medium size thumbnails and cluster colors of categorical data selected in *Object Appearance*; c) UMAP projection with medium size thumbnails and filtered-out objects in grey; d) UMAP projection with small thumbnails and cluster colors, providing a more compact representation; e) t-SNE projection, showing an alternative dimensionality reduction technique; f) Simple x/y plot, here showing PC1 over time for temporal analysis. The flexibility of the CSN tool provides the ability to effectively explore and compare data across different visualization methods via displaying multiple different 2D projections, flexible based on data import configuration, selectable in *Data & Projections*, combined with thumbnail sizes and cluster highlights as adjustable via the *Object View Settings*.

3.2 Design principles

To make complex interactions in multifaceted datasets comprehensible while meeting the diverse needs of researchers, we formulated three design principles for the tool:

1. Providing an open modular system that adapts to different research needs, domains and datasets while preventing information overload;
2. Providing a complete overview of the collection while encouraging immersive exploration of the objects;

3. Providing a multitude of interaction mechanisms and modalities to foster intuition, such as zooming, panning, hovering, and sliding through feature dimensions.

3.3 Components

3.3.1 Projection Area

The central part of the interface is the *Projection Area* (Figure 1 center). It maps the given input collection in its entirety as miniature images in an interactive 2D scatter plot, with coordinates defined by the chosen projection method. Basic navigation operations such as zooming or “drag and move” allow free exploration of the projection space. While the user sees only 2 dimensions in the central projection area, the CSN technically includes a third axis for depth. Moving along the depth axis (by zooming) effectively reveals overlapping objects. The appearance of the thumbnails can be adjusted in the *Object Panel*.

3.3.2 Object Panel

The *Object Panel* (Figure 1 left) has three collapsible sub-menus: *Object Preview*, *Object Info* and *Object Appearance*. The *Object Preview* section displays a larger version of the miniature thumbnail currently hovered on in the *Projection Area*.

By default it simply shows a larger version of the same thumbnail, but it can be set to display a higher resolution version of the hovered image, stored either locally or remotely.

The *Object Info* section provides detailed information on the currently selected object. This aspect of the CSN is highly flexible, as the metadata fields that provide this information can be easily defined in the separate configuration file. Minimally it can display just the file name, but it can equally well include extensive metadata — for example in the case of art collections, the author, production year, location, genre, style, and other details.

The *Object Appearance* section contains options to control the visual appearance of the objects in the *Projection Area*. A predefined group (from categorical metadata) can be selected from a drop-down list to show clusters. Objects of the same category are depicted with the same color border around their thumbnails. The size and scale of the miniature images are adjustable with convenient sliders. Size determines how large the thumbnails should be when fully zoomed out, while Scale affects the size when zoomed in.

3.3.3 Control Panel

The *Control Panel* (Figure 1 right) has four collapsible sub-menus: *Data & Projections*, *Dimension Filters*, *Advanced Filters*, and *Export Filtered Data*. The *Data & Projections* section contains a *Dataset* drop-down list of selectable datasets. For very large collections, we recommend providing a smaller subset by default and offering the entire set on demand (such subsets can be conveniently produced using the CSN configuration Python notebook). The section also contains a *Projection* drop-down list of selectable projections and mappings. Switching between different projections, e.g. different embedding or reduction methods, smoothly rearranges the positions of the objects in the *Projection Area*. These intuitive animations can provide new insights into the intermediate state between two projections and expose their differences.

The *Dimension Filters* are optional interactive elements that function to filter the objects in the *Projection Panel* (Figure 3). They control the range of the assigned variables, which could be dimensions of the embedding, metadata such as date or year of creation of an artwork, or inferred properties of the image such as colorfulness or contrast. Histograms above the range sliders provide additional statistical information and feedback on

how changes affect the distribution of the mapping. They are constantly updated to reflect the distribution of the entire dataset as well as the distribution of filtered and unfiltered objects. Clicking on a histogram activates the *Bin Mode*: moving the cursor over the bars of the histogram temporarily displays only objects within the narrow range of the bar. A second click terminates this function and sets the filters back to the previous state. Additionally, hovering over the thumbnails in the *Projection Area* highlights the corresponding vertical bar in each histogram.

The *Advanced Filters* section is a text field to construct and apply search and filter queries. By default, it handles basic query operators such as AND, OR, equals (==), does not equal (!=), as well as custom operators. Nested and complex search queries are also supported using round brackets. In the setup, using the configuration Python notebook, each metadata field can be defined as a Free Text Entry (enabling queries) or as a Categorical Selection (generating drop-down lists, i.e. GUI elements that allow simple search and selection).

The *Export Filtered Data* section in the *Control Panel* allows downloading the metadata of the currently filtered objects as a CSV file, and the current projection view as PNG file.

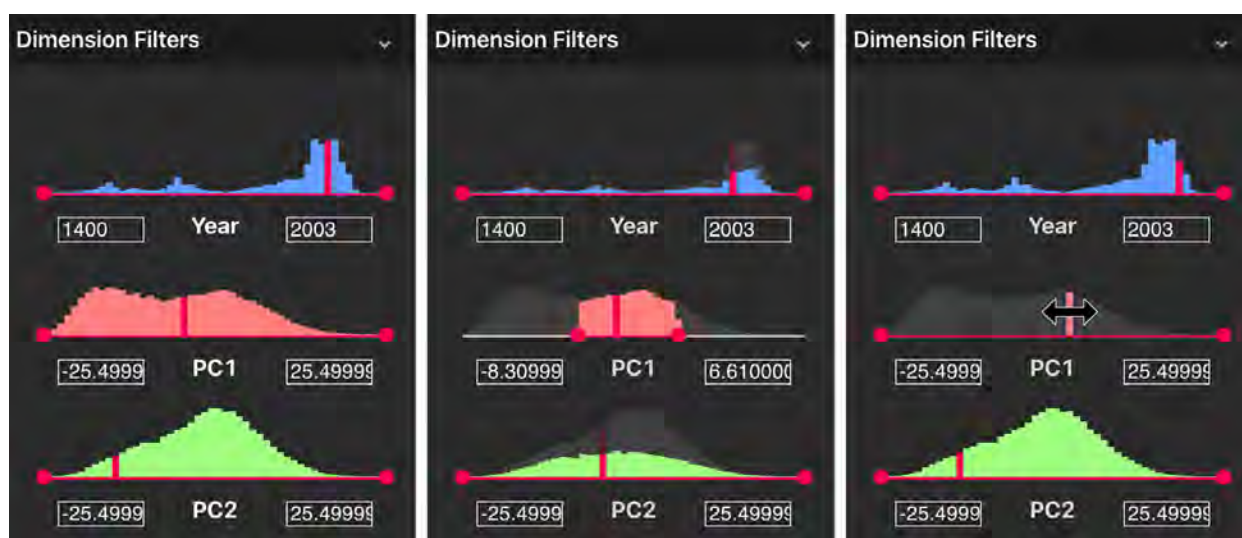


Figure 3: Interactive Dimension Filters. Left: Unfiltered Dimension Filters, consisting of range sliders with interactive histograms above them, showing the distribution of all objects along the slider’s dimension with the bin of the currently selected object highlighted in red; Center: Reducing the range of one slider affects the distribution of all dimensions, reflected by the histograms; Right: *Bin Mode* functionality is activated by clicking on a histogram, allowing the user to activate one bin at a time, with the Projection Area displaying the corresponding objects within the active bin. These interactive Dimension Filter features allow in-depth exploration and visualization of multi-dimensional data distributions allowing users to gain a deeper understanding of the relationships between data points.

4 Applications

An important aspect of the CSN is the flexibility to combine different data types and different methods for feature extraction and dimensionality reduction. To initially test the CSN towards many potential applications in other disciplines, we utilized the application in several use cases within our multidisciplinary research lab. All these cases vary in terms of research questions, approaches, and datasets. Here we briefly describe three examples which (i) analyze embedding spaces, (ii) study multidimensional metadata, and (iii) explore and curate large sets of generated images respectively. Mixed applications are of course possible. A growing diversity of application demos will be added to the project website¹.

¹<https://collection-space-navigator.github.io/>

4.1 Analyzing aesthetic complexity in art collections

Karjus et al. (2022) propose quantifying visual aesthetic complexity using “compression ensembles”, an information theory driven method based on transforming images using visual filters and repeatedly compressing them. This approach produces embeddings analogous to those from deep learning based image embeddings, but with explainable and arguably more interpretable results in the aesthetic domain. This paper uses the same dataset as our examples in figures 1 to 3 and our associated initial demo application, i.e. a corpus of digitized images of visual art such as paintings and drawings, a subset of 74,028 works of the art500k project corpus (Mao et al. 2017), in turn primarily sourced from Wikiart, covering mainly Western art of the last 400 years.

Here and in similar projects focusing on visual art, the CSN can serve both as a research and a presentation tool in several capacities. The visual and interactive overviews of the embedded artworks allow for a closer examination of art historical trends over time and in relation to their aesthetic complexity. Using multiple representations and filters can further help to build an intuitive understanding of the given embedding method. In the case of compression ensembles, the variables or dimensions are interpretable (Karjus et al. 2022), and can be decorrelated and grouped, for example using Principal Component Analysis. A concrete usage of the CSN in this circumstance is for example to display the dataset in the projection area using two principal components or specific compression dimensions as x and y coordinates, while filtering another compression dimension with the range sliders to visualize the respective interaction.



Figure 4: Two distinct use cases of the Collection Space Navigator. Left: Historical newsreels with rich metadata; Right: Investigating text-to-image generation through Stable Diffusion with linguistic basic concepts as prompts. By using domain specific metadata filters and projections, the CSN tool allows for deeper exploration providing insight into visual and thematic patterns.

4.2 Studying represented worldviews in historical newsreels

Oiva et al. (forthcoming) propose a multidisciplinary framework for the study of historical newsreels, which can be extended to news broadcasts and audiovisual collections more broadly. The initially analyzed dataset consists of 1747 newsreels produced weekly over 50 years in the Soviet Union.

Within the project, the digitized video clips, about 8-10 minutes each, are split into individual frames, i.e. static images, which form the unit of analysis either in their full granularity or coarse-grained, for example as a single frame per shot. The material consists of predominantly black and white footage of variable quality, transitioning to color towards the end of the period. Rich metadata accompanies the visual information. Taking all this into account, the authors aim to analyze and understand the material, including in particular the variation of intrinsic worldviews.

In this project, the CSN is used both as a presentation tool to communicate to the audience, and a research tool for the authors (Figure 4), allowing for exploration of the film footage, to identify recurring patterns and shots, and to generate hypotheses based on a combination of the visual representation of movie frames based on image embedding vectors, and accompanying metadata. In this case, indeed, a stronger focus lies on the latter explicit metadata-dimensions, which can be mapped to range-sliders in a similar way as the numerical vectors in example 4.1.

4.3 Exploration and curation of text-to-image models

The advent of easily accessible text to image models such as DALL-E, Midjourney, and Stable Diffusion (Romach et al. 2022). has brought artistic and photo-realistic image generation to the mainstream. This is very likely to transform creative industries in the near future. Yet the effectively near-infinite content capacity will require understanding of the models to be made use of, and efficient curation to work with already generated images.

The CSN is well suited for such tasks, allowing for insight into large image sets using various visual similarity and metadata representations and filtering options. For the demo, we generated of images with Stable Diffusion 1.5 using the basic word list of the Automated Similarity Judgement Program (ASJP) (Brown et al. 2008) as the input text prompts, and embedded them using the ResNet50 pretrained image model.

This approach, querying simple terms such as colors, body parts and animals, allows for probing the “defaults” of the text2image models, while generating multiple versions of each prompts yields insight into variation in its capacity. The same approach could be used to compare different models, as well as investigate effects of complexity of the prompts. Naturally, more complex prompts such as those common in artistic text2image creation could be explored as well.

5 Conclusion

The Collection Space Navigator (CSN) as introduced in this paper is a powerful and flexible data visualization tool working with large sets of images associated with multidimensional data, including embedding vectors and tabular metadata. The CSN is publicly available on Github, including a functioning demo as well as a How-To configuration and usage guide in form of an interactive Python notebook. As described above, the interface can be conveniently and readily tailored to the needs of a particular research project and dataset. An important aspect of the CSN in this regard is its flexibility to combine different vector and metadata types, a variety of projection methods, and a diversity of representations. This includes the bespoke configuration of different representation and filter controls, resulting in an elegant user interface that allows the user to focus on the material under investigation, without unnecessary distractions in the form of “default” controls.

We have exemplified the CSN here using visual data. Yet, while input data is by default represented by small images or thumbnails in the Projection Area, the input does not need to be vectors derived from images. For example, embeddings or metadata of audio or text could be visualized equally well, represented by suitable thumbnails or labels. We imagine, such “unorthodox” usage could facilitate the exploration and further research on such non-visual spaces of meaning too. By making the code fully open source, we encourage further development in this and other directions, for example adding playback functionality to images associated with audio or video files.

In sum, the Collection Space Navigator (CSN) is a new research tool that facilitates the work of artists, curators, scholars, and scientists, who study large collections of digital visual artifacts associated with metadata and/or vector embeddings. We release the CSN as open source under MIT License, to enable broad reuse and

further development without restriction. We hope it will invigorate a diverse ecology of multidisciplinary research and curatorial practice, and help to deepen our collective understanding of multidimensional meaning spaces.

Code availability and demo

The CSN is released as open-source (MIT licence), with code and documentation available on GitHub at <https://github.com/Collection-Space-Navigator/CSN>

A live demo, using the the same example data as in figures 1 to 4 in this paper, is available at <https://collection-space-navigator.github.io/CSN>

Author contributions, acknowledgments and funding

T.O. and M.C. designed, co-authored, and developed the Collection Space Navigator. T.O., M.C., A.K. and M.S. contributed to the research design and co-wrote the manuscript. T.O., M.C. and A.K. collected data. T.O. and M.C. contributed equally to this work as first authors. The authors thank Sebastian Ahnert, Mila Oiva, and the entire CUDAN team for useful conversations and input. All authors are supported by the CUDAN ERA Chair project, funded through the European Union’s Horizon 2020 research and innovation program (Grant No. 810961)

References

- Ahlberg, Christopher and Ben Shneiderman (1994). “Visual information seeking using the filmfinder”. In: *Conference companion on Human factors in computing systems*, pp. 433–434.
- Amid, Ehsan and Manfred K Warmuth (2019). “TriMap: Large-scale dimensionality reduction using triplets”. In: *arXiv preprint arXiv:1910.00204*.
- Bastian, Mathieu, Sebastien Heymann, and Mathieu Jacomy (2009). “Gephi: an open source software for exploring and manipulating networks”. In: *Proceedings of the international AAAI conference on web and social media*. Vol. 3. 1, pp. 361–362.
- Berghaus, Heinrich Karl Wilhelm (1845). *Physikalischer Atlas oder Sammlung von Karten: auf denen die hauptsächlichsten Erscheinungen der anorganischen und organischen Natur nach ihrer geographischen Verbreitung und Vertheilung bildlich dargestellt sind*. Text. Vol. 1. Justus Perthes.
- Bertin, Jacques (2010). *Semiology of graphics: Diagrams, networks, maps*.
- Böhm, Jan Niklas, Philipp Berens, and Dmitry Kobak (2022). “Attraction-repulsion spectrum in neighbor embeddings”. In: *Journal of Machine Learning Research* 23.95, pp. 1–32.
- Brown, Cecil H, Eric W Holman, Søren Wichmann, and Viveka Velupillai (2008). “Automated classification of the world’s languages: a description of the method and preliminary results”. In: *Language Typology and Universals* 61.4, pp. 285–308.
- Custer, Grant (2020). *An interactive UMAP visualization of the MNIST data set*. <https://github.com/GrantCuster/umap-explorer>. [Online; accessed 10-May-2023].
- Devlin, Jacob, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova (2018). “Bert: Pre-training of deep bidirectional transformers for language understanding”. In: *arXiv preprint arXiv:1810.04805*.
- Diagne, Cyril, Nicolas Barradeau, and Simon Doury (2018). *t-SNE Map*. <https://experiments.withgoogle.com/t-sne-map>. [Online; accessed 19-July-2022].
- Duhaime, Douglas (2017). *PixPlot*. <https://github.com/YaleDHLab/pix-plot>. [Online; accessed 19-July-2022].

- Glinka, Katrin, Christopher Pietsch, and Marian Dörk (2017). “Past Visions and Reconciling Views: Visualizing Time, Texture and Themes in Cultural Collections.” In: *DHQ: Digital Humanities Quarterly* 2.
- He, Kaiming, Xiangyu Zhang, Shaoqing Ren, and Jian Sun (2016). “Deep residual learning for image recognition”. In: *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 770–778.
- Karjus, Andres, Mar Canet Solà, Tillmann Ohm, Sebastian E Ahnert, and Maximilian Schich (2022). “Compression ensembles quantify aesthetic complexity and the evolution of visual art”. In: *arXiv preprint arXiv:2205.10271*.
- Kolesnikov, Alexander, Lucas Beyer, Xiaohua Zhai, Joan Puigcerver, Jessica Yung, Sylvain Gelly, and Neil Houlsby (2020). “Big transfer (bit): General visual representation learning”. In: *European conference on computer vision*. Springer, pp. 491–507.
- Krizhevsky, Alex, Ilya Sutskever, and Geoffrey E Hinton (2017). “Imagenet classification with deep convolutional neural networks”. In: *Communications of the ACM* 60.6, pp. 84–90.
- Labs, Cloudera Fast Forward (2019). *Active Learner prototype*. <https://activelearner.fastforwardlabs.com>.
- Lee, Po-shen, Jevin D West, and Bill Howe (2017). “Viziometrics: Analyzing visual information in the scientific literature”. In: *IEEE Transactions on Big Data* 4.1, pp. 117–129.
- Manovich, Lev (2012a). “How to compare one million images?” In: *Understanding digital humanities*. Springer, pp. 249–278.
- Manovich, Lev (2012b). “Media visualization: Visual techniques for exploring large media collections”. In: *Media studies futures*, pp. 1–21.
- Manovich, Lev, Moritz Stefaner, Mehrdad Yazdani, Dominikus Baur, Daniel Goddmeyer, Alise Tifentale, Nadav Hochman, and Jay Chow (2015). *The Selfexploratory*. <https://selfiecity.net/selfieexploratory/>. [Online; accessed 19-Dec-2022].
- Mao, Hui, Ming Cheung, and James She (2017). “Deepart: Learning joint representations of visual arts”. In: *Proceedings of the 25th ACM international conference on Multimedia*, pp. 1183–1191.
- McInnes, Leland, John Healy, and James Melville (2018). “Umap: Uniform manifold approximation and projection for dimension reduction”. In: *arXiv preprint arXiv:1802.03426*.
- Nolli, Giambattista (1748). *La nuova topografia di Roma*. Rome.
- Øygaard, Audun M. (2017). *Visualizing an Art Collection*. <http://auduno.github.io/2018/10/27/visualizing-an-art-collection/index.html>. [Online; accessed 19-July-2022].
- Pearson, Karl (1901). “LIII. On lines and planes of closest fit to systems of points in space”. In: *The London, Edinburgh, and Dublin philosophical magazine and journal of science* 2.11, pp. 559–572.
- Pietsch, Christopher (2017). *VIKUS Viewer*. <https://github.com/cpietsch/vikus-viewer>. [Online; accessed 19-July-2022].
- Pietsch, Christopher, Viktoria Brüggemann, Mark-Jan Bludau, and Marian Dörk (2020). *Visuelle Exploration Zweier Musealer Sammlungen*. <https://visualisierung.smb.museum>. [Online; accessed 19-July-2022].
- Radford, Alec, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. (2021). “Learning transferable visual models from natural language supervision”. In: *International Conference on Machine Learning*. PMLR, pp. 8748–8763.
- Ren, Zhao, Kun Qian, Zixing Zhang, Vedhas Pandit, Alice Baird, and Bjorn Schuller (2018). “Deep scalogram representations for acoustic scene classification”. In: *IEEE/CAA Journal of Automatica Sinica* 5.3, pp. 662–669.
- Rombach, Robin, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer (2022). “High-resolution image synthesis with latent diffusion models”. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 10684–10695.
- Sanderson, Grant (2017). *Thinking outside the 10-dimensional box*. <https://www.youtube.com/watch?v=zwAD6dRSVyI>. [Online; accessed 19-December-20022].

- Shannon, Paul, Andrew Markiel, Owen Ozier, Nitin S Baliga, Jonathan T Wang, Daniel Ramage, Nada Amin, Benno Schwikowski, and Trey Ideker (2003). “Cytoscape: a software environment for integrated models of biomolecular interaction networks”. In: *Genome research* 13.11, pp. 2498–2504.
- Simonyan, Karen and Andrew Zisserman (2014). “Very deep convolutional networks for large-scale image recognition”. In: *arXiv preprint arXiv:1409.1556*.
- Smilkov, Daniel, Nikhil Thorat, Charles Nicholson, Emily Reif, Fernanda B Viégas, and Martin Wattenberg (2016). “Embedding projector: Interactive visualization and interpretation of embeddings”. In: *arXiv preprint arXiv:1611.05469*.
- Sohl-Dickstein, Jascha, Eric Weiss, Niru Maheswaranathan, and Surya Ganguli (2015). “Deep unsupervised learning using nonequilibrium thermodynamics”. In: *International Conference on Machine Learning*. PMLR, pp. 2256–2265.
- Tang, Jian, Jingzhou Liu, Ming Zhang, and Qiaozhu Mei (2016). “Visualizing large-scale and high-dimensional data”. In: *Proceedings of the 25th international conference on world wide web*, pp. 287–297.
- Van der Maaten, Laurens and Geoffrey Hinton (2008). “Visualizing data using t-SNE.” In: *Journal of machine learning research* 9.11.
- Victor, Bret (2011). *Scientific communication as sequential art*. [http : / / worrydream . com / ScientificCommunicationAsSequentialArt](http://worrydream.com/ScientificCommunicationAsSequentialArt). [Online; accessed 10-May-2023].
- Williamson, Christopher and Ben Shneiderman (1992). “The Dynamic HomeFinder: Evaluating dynamic queries in a real-estate information exploration system”. In: *Proceedings of the 15th annual international ACM SIGIR conference on Research and development in information retrieval*, pp. 338–346.
- Zhang, Jiajing, Yongwei Miao, Junsong Zhang, and Jinhui Yu (2020). “Inkthetics: a comprehensive computational model for aesthetic evaluation of Chinese ink paintings”. In: *IEEE Access* 8, pp. 225857–225871.